


# Installation Guide


WI-PS205H | WI-PS210H | WI-PS518GH | WI-PS526GH | WI-PS308GH  
 WI-PS309GFH | WI-PS318GFH | WI-PS326GFH | WI-PS305GH

## 1. Package Contents


1.1 Take WI-PS518GH as an example.



1 x WI-PS518GH



1xAC Power Cord




2xWall Mount kit



1xInstallation Guide

## 2. Hardware Introduction

2.1 Front Panel



LED light, DIP Switch, 16 100Mbps RJ45 PoE+ Ports, 1 1000Mbps RJ45 Port, 1 1000Mbps Combo Port



Fan, AC In Port, Grounding Interface

### WI-PS518GH

#### DIP Switch Description


Default	The transmission distance of PoE port can be up to 100m with 100Mbps, but the rate is limited to 10Mbps and PoE Watchdog is disable.
VLAN	All downlink ports are isolated from each other, but can communicate with uplinkports, and PoE Watchdog is enabled.
CCTV	The transmission distance of PoE port can be up to 250m, but the rate is limited to 10Mbps, and VLAN mode and PoE Watchdog are enabled.

Note: PoE Watchdog - All PoE ports enable PoE watchdog function, which can detect and reboot the offline compliant PoE powered devices.

#### LED Light

PoE	Off: PoE not working On: PoE is working
Link	On: Data on TX/RX Off: Ports link down
18T:	On: Port 18 link up Off: Port 18 link down
17T/17S	On: Port 17T/17S link up Off: Port 17T/17S link down
PoE Max	When total PoE output power > Power Budget * 80%, the LED light will be ON.
Power	On: The device power on is normal Off: The device is power off or failed

## 3. Hardware Installation

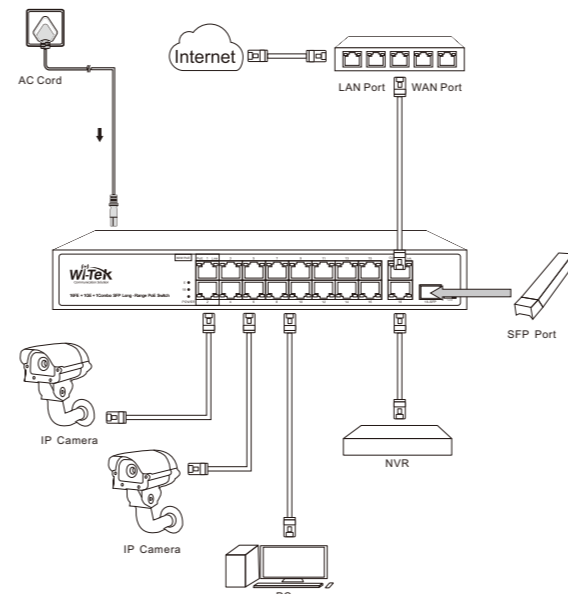

Model	WI-PS205H	WI-PS210H	WI-PS518GH	WI-PS526GH	WI-PS308GH
Interface	4 100Mbps RJ45 PoE Ports 2 100Mbps RJ45 Ports	8 100Mbps RJ45 PoE Ports 2 100Mbps RJ45 Ports	16 100Mbps RJ45 PoE Ports 1 1000Mbps RJ45 Port 1 1000Mbps Combo	24 100Mbps RJ45 PoE Ports 1 1000Mbps RJ45 Port 1 1000Mbps Combo	8 1000Mbps RJ45 PoE Ports 2 1000Mbps RJ45 Ports
Power Supply	AC 100~240V 50/60Hz				
PoE Standard	802.3 af/at compliant PoE				
PoE Ports	Port 1-4	Port 1-8	Port 1-16	Port 1-24	Port 1-8
Power Budget	40W	65W	150W	200W	65W
DIP Switch	Default/CCTV	Default/VLAN/CCTV	Default/VLAN/CCTV	Default/CCTV	Default/VLAN/CCTV
PoE Watchdog	Yes	Yes	Yes	Yes	Yes

Model	WI-PS309GFH	WI-PS318GFH	WI-PS326GFH	WI-PS305GH
Interface	8 1000Mbps RJ45 PoE Ports 1 1000Mbps RJ45 Ports 1 1000Mbps SFP Port	16 1000Mbps RJ45 PoE Ports 2 1000Mbps Combo	24 1000Mbps RJ45 PoE Ports 2 1000Mbps SFP Ports	4 1000Mbps RJ45 PoE Ports 1 1000Mbps RJ45 Port
Power Supply	AC 100~240V 50/60Hz			
PoE Standard	802.3 af/at compliant PoE			
PoE Ports	Port 1-8	Port 1-16	Port 1-24	Port 1-4
Power Budget	65W	200W	280W	45W
DIP Switch	Default/VLAN/CCTV	Default/VLAN/CCTV	Default/VLAN/CCTV	Default/VLAN/CCTV
PoE Watchdog	Yes	Yes	Yes	Yes

## Warranty Card

Username	
Address	
Telephone No.	
Purchase Shop	
Purchase Address	
Product Model No.	
Purchase Time	
Serial No.	
Dealer Signature	

- If the product defects within three months after purchase, we will provide you a new product of the same model.
- If the product defects within the three-year warranty period, we will provide the professional maintenance service.
- Proof of purchase and a complete product serial number are required to receive any services guaranteed as part of the limited warranty.
- Any other defects that are not caused by workmanship or product quality, such as natural disaster, water damage, extreme thermal or environmental conditions, sticker damaged, warranty card losing will disqualify the product from limited warranty.



Technical Support



Cloud Management



Company Website

Wireless-Tek Technology Limited  
 Address: Biaofang Technology Building 402, Bao'an street,  
 Baoan District, Shenzhen City, Guangdong, China  
 Website: www.wireless-tek.com  
 Tel: 86-0755-32811290  
 Email: sales@wireless-tek.com  
 Technical Support: tech@wireless-tek.com